





For us, it's not just business. It's personal.

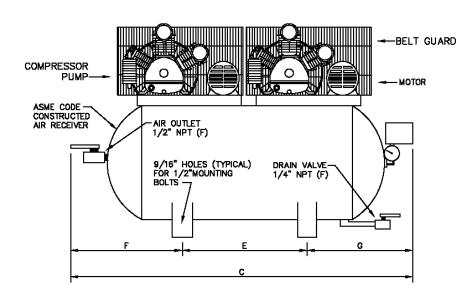



PERFORMANCE DATA

MODEL	HP	DELIVERY		PRESSURE	SETTINGS	RECEIVER		COMPRESSOR			
		SCFM	L/S	PSIG	KPA	Gal US.	LITERS	PUMP	RPM	CYL	STGS
CC-DX-0230	2	9.2	4.34	70 — 90	483 - 620	30	113	CK-40	544	3	1

DIMENSIONAL DATA (inches)

MODEL	Α	В	С	D	Е	F	G
CC-DX-0230	38	20	52	15	18	17	17

ELECTRICAL DATA (60Hz)

APPROX. FULL LOAD AMPS									
HP.	Single	Phase	Three Phase						
	110V.	220V.	200V.	230V.	460V.	575V.			
2	25.6	12.8	6.6	6.0	3.0	2.4			

WT. DISTRIBUTION (Lbs)

, , , , , , , , , , , , , , , , , , , ,										
FT.1	FT.2	FT.3	FT.4	TOTAL						
84	130	79	130	423						
	BELT GUARD SIDE									
	2 4									
	.		0							
	1		3	i						

OMEGA AIR COMPRESSORS	HVAC SERIES	2HP TANK MOUNTED DUPLEX COMPRESSOR		Print No: Dwg: Chk'd	ESJL33S-1 Scale: Not to. Wt Dist: +-5lbs
Typical only. Data & spe May not include accessed		Project Refe	erence:		